





WP25GB PROFILE

WEATHER PROOF LINEAR GRAZER BAR LUMINAIRE

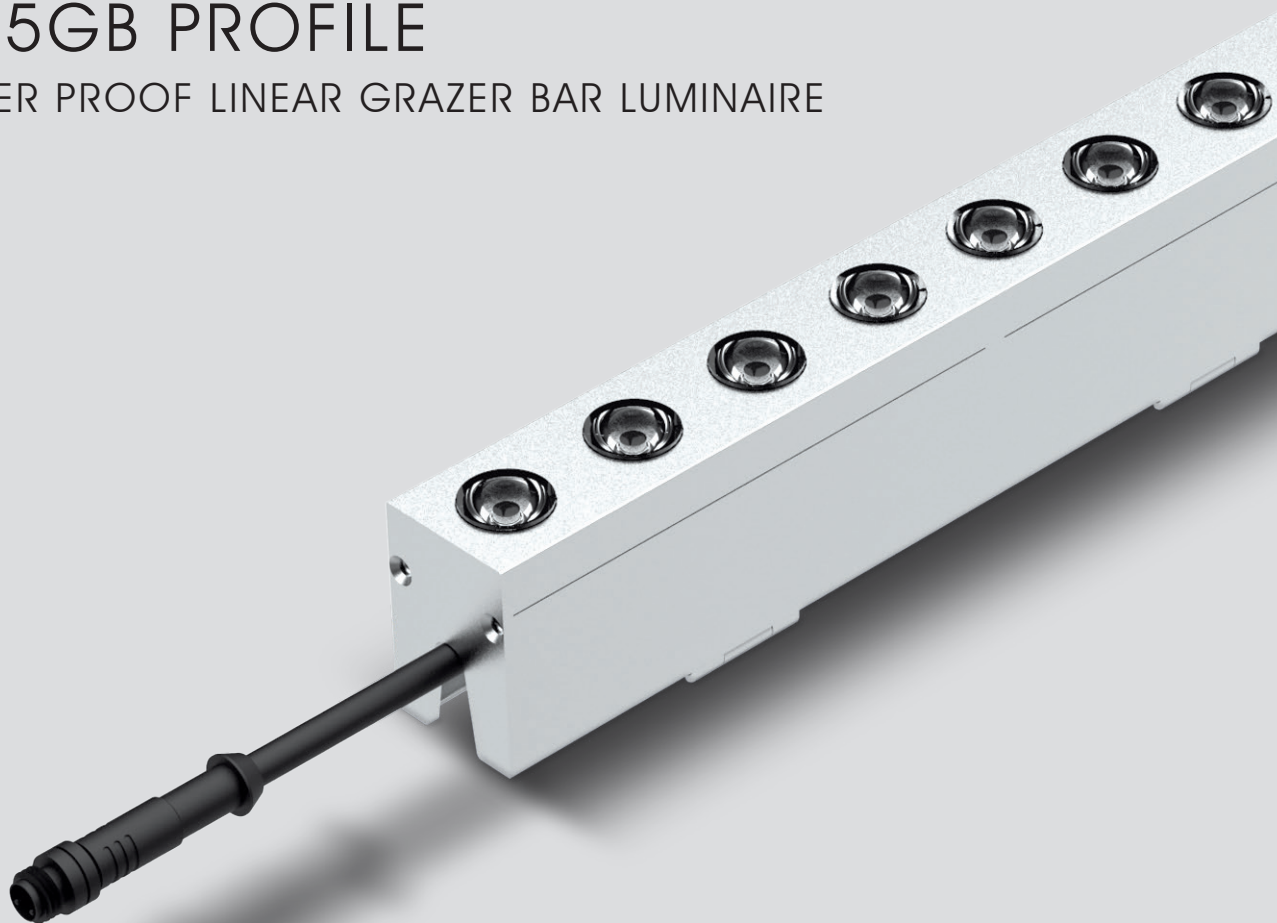

PROFILE FINISHING

Silver Anodized

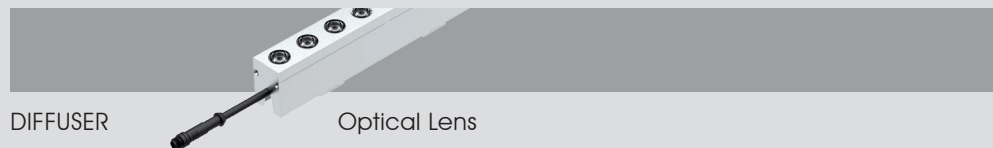


DIFFUSER

Optical Lens

DIMENSION




INSTALLATION

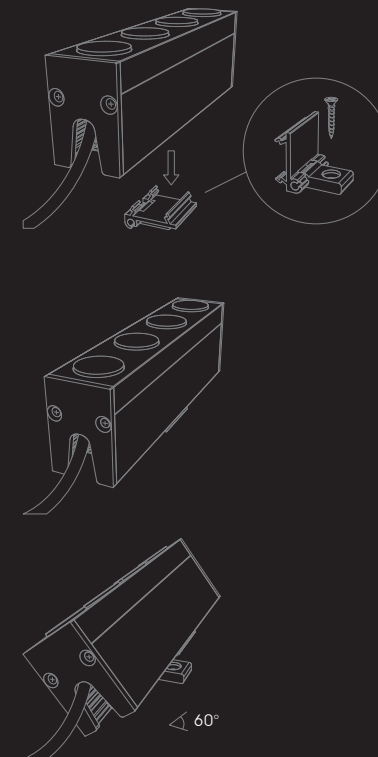


Beam Angle: 20°



Beam Angle: 30°



Beam Angle: 25° x 40°

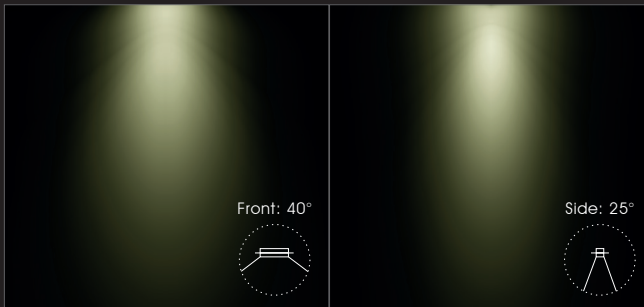

- Profile Type : 25mm width aluminium linear luminaire
- Profile Finishing : Silver Anodised
- Diffuser : Optical lens
- Mounting : Surface, with 90° adjustable mounting clip
- CRI : Ra>90, R9>50
- SDCM : 3 step MacAdam ellipse binning
- Lifetime : Up to 50,000 hours L80 lamp life at Ta = 25°C
- Voltage : 24V DC
- Power : 42W/m
- Length Options : 100mm, 200mm, 300mm, 500mm, 600mm, 5 x 100mm
- Luminous Flux : 370 - 2331 lm/m
- Efficacy : 88 - 93 lm/W
- Operating Temperature : Ta (min) = -40°C, Ta (max) = +45°C
- Wire Connection : Supplied with insulated IP67 wires and connector at 200mm length
- IP Rating : IP67


☐ CCT OPTIONS

Single CCT




PHOTOMETRICS


With 20° 4.2W

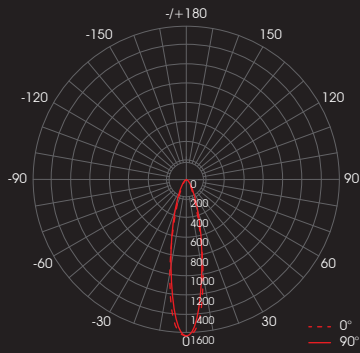

With 30° 4.2W

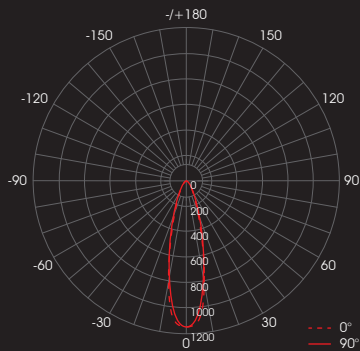

With 25° x 40° 4.2W

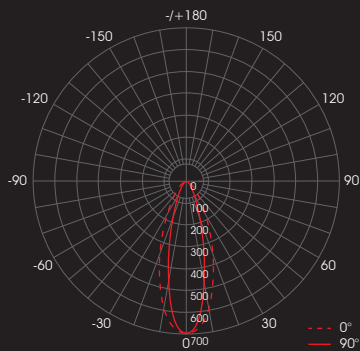

SPECIFICATIONS

CCT	Efficacy (lm/W)	Luminous Flux (lm) @ Length / Power				
		100mm	200mm	300mm	500mm x 5	600mm
		4.2W	8.4W	12.6W	21W	25.2W
2700K	88.1	370	740	1110	1850	2220
3000K						
3500K						
4000K	92.5	389	777	1166	1943	2331
5000K						
5700K						

ORDERING MATRIX

LINEAR GRAZER BAR

Module	Finishing	Beam Angle	Length	CCT	Wire End Configuration	Ingress Protection
WP25GB	SL Silver	20 20°	100 100mm (4.2W)	27 2700K	SR Single Wire End, Rear Exit DR Double Wire End, Rear Exit	IP67 IP67
		30 30°	200 200mm (8.4W)	30 3000K		
		25x40 25° x 40°	300 300mm (12.6W)	35 3500K		
			500 500mm (21W)	40 4000K		
			600 600mm (25.2W)	50 5000K		
			5x100 5 x 100mm (21W)	57 5700K		

Example: WP25GB-SL-20-300-30-S-IP67

WP25GB Grazer Bar, Silver, 20 Degree Beam, 300mm, 3000K, Single Wire End, IP67, Including 2 x Mounting Clip

*Linear Grazer Bar of 100mm, 200mm, 300mm, 500mm and 600mm lengths are supplied with 2 mounting clips.

*Linear Grazer Bar of 5 x 100mm length are supplied with 10 mounting clips (2 for each bar).